




Dry Floors, Circulate and Exhaust Air



HAWK BVP50
2820 CFM Air Mover

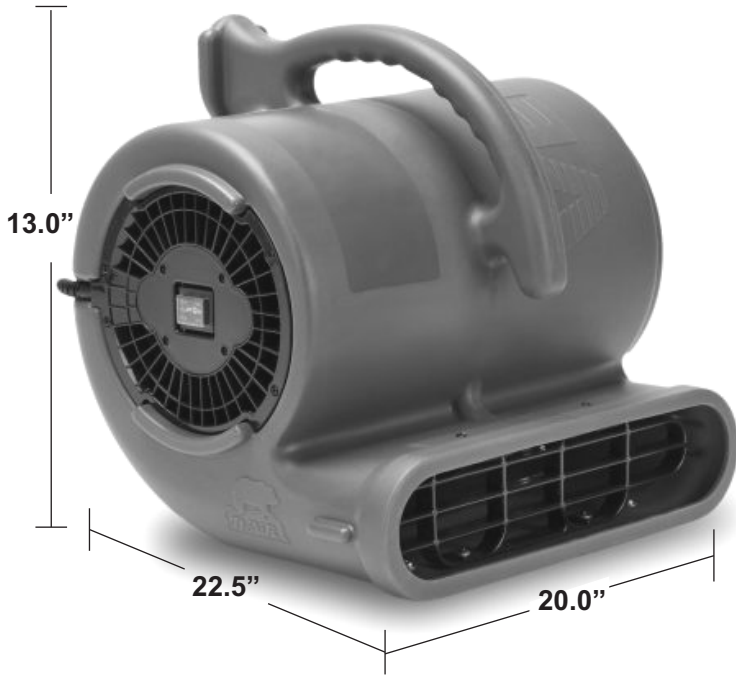

HAWK BVP50H
with Handle and
Transport Wheels



The safest and most efficient centrifugal air mover on the market. Our 1/2 HP motor generates up to 2820 CFM with just 4.5 amps usage. Control the CFM and Amp draw with our state of the art 2-speed moisture resistant switch. The rotationally molded body is stronger, lighter and capable of stacking 4 high in storage. Available with convenient telescoping cart (BVP50H).

Engineered Design

- The 1/2 HP, 2-Speed motor is efficient and produces up to 2820 CFM airflow
- 25 ft. 16 AWG power cord
- The motor is sealed to prevent moisture from entering and damaging internal motor components
- The side-mounted 2-speed switch is moisture resistant
- Sturdy Roto-Molded plastic design has a profile that allows for vertical stacking up to 5 units for convenient storage
- The **BVP50** multipurpose design directs air at 3 angles (horizontally, 45° and 90°).
- The **BVP50H** adds a telescoping handle and transport wheels. Use horizontally, or tip back 90 degrees and move air straight upward.
- A plastic cage protects motor and fans from debris
- C-ETL listed

Specifications

| | |
|----------------------------|--|
| Model | BVP50, BVP50H (with Telescoping Handle & Wheels) |
| Motor | 1/2 HP, 115V, 60Hz |
| Air Volume | 2820 CFM (High Speed) / 2390 CFM (Low Speed) |
| Amp Draw | 4.5 Amp (High Speed) / 2.8 Amp (Low Speed) |
| Max Static Pressure | 2.5" |
| Air Flow Direction | 0, 45 and 90 degrees |
| Frame Construction | Sturdy Roto-Molded Plastic |
| Stackable | 4 units |
| Weight | 25 lbs. (net) / 28 lbs. (gross) |
| Size (LxWxH) | 22.5"x 20"x 13" |
| Attached Cord | 25 Ft. 16 AWG |
| Sound Level | 74 dB |
| Certification | C-ETL-US |

Subject to Change Without Notice



Store Up To
5 Stacked Units



BVP50H Adds Dual
Transport Wheels and
Telescoping Handle



Direct Airflow at 3 Angles
(Horizontally, 45° and 90°).



Quiet Janitorial Jobs
74 dB at High Speed