


Dry Floors, Circulate and Exhaust Air



Control the air flow and amp draw with our state of the art 2-speed moisture resistant switch. The roto-molded body is strong, lightweight and easy to clean, transport and stack. The BVP50H model adds a telescoping handle frame with transport wheels.

Engineered Design

- The 1/2 HP, 2-speed motor is efficient and produces up to 2820 CFM airflow
- 25 ft. 16 AWG power cord
- The motor is sealed to prevent moisture from entering and damaging internal motor components
- The side-mounted 2-speed switch is moisture resistant
- Sturdy roto-molded plastic frame design has a profile that allows for vertical stacking up to 4 units for convenient storage
- The BVP50 multipurpose design directs air at 3 angles (horizontally, 45° and 90°)
- The BVP50H adds a telescoping handle and transport wheels. Use horizontally, or tip back 90 degrees and move air straight upward
- A plastic cage protects motor and fans from debris
- C-ETL listed
- 5 year warranty on roto-molded chassis. 2 year warranty on parts












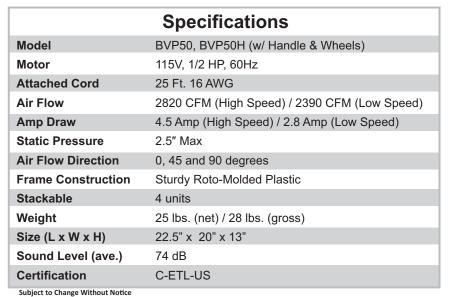

HAWK BVP50H with Handle and

Transport Wheels



Store Up To

5 Stacked Units

Direct Airflow at 3 Angles (0°, 45° and 90°).



BVP50H Adds Dual Transport Wheels and Telescoping Handle



Compact Air Moving Power